

HQ-AR2 TRIANGLE RACK




Installation manual

Web: www.hqmount.com

Email: info@hqmount.com

Components

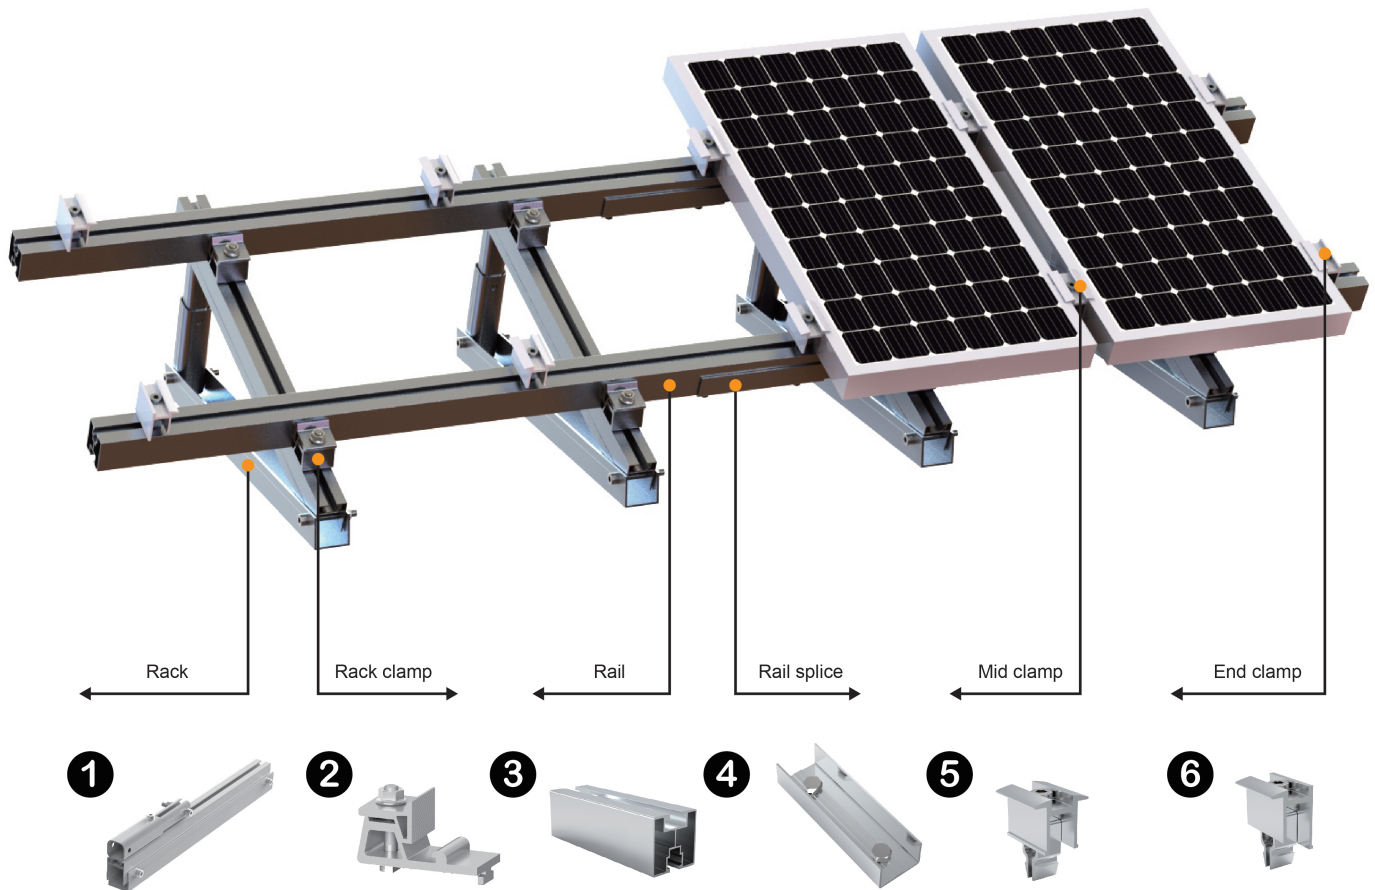

Installation Tools



Hexagon socket wrench



Marker



Tape measurement



Electrical drill

HQ-AR2 TRIANGLE RACK




Installation manual

Web: www.hqmount.com

Email: info@hqmount.com


Step 1 Installation- Expansion bolt

According to the drawing, mark position for M10*100 Expansion bolt (A/B), then fix expansion bolt to the concrete with at least 20mm out of the ground.

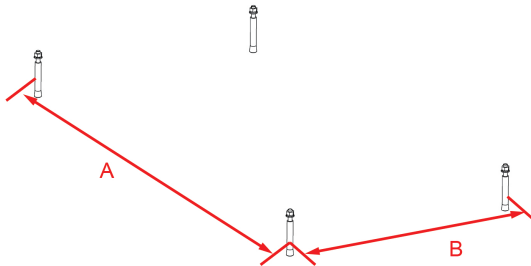


Step 2 Installation-Front leg

- a: Using M8*55 Allen bolt kit to fasten AR2 rack
- b: According to the drawing, fix pre-assemble AR2 rack to the expansion bolt, then fix the AR2 rack tight.

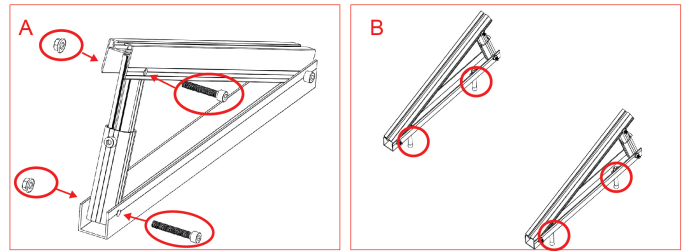


Step 3 Rail clamp

- a: Insert Rail clamp into Beam with the bulge
- b: Bulge slide in
- c: T bolt slide in

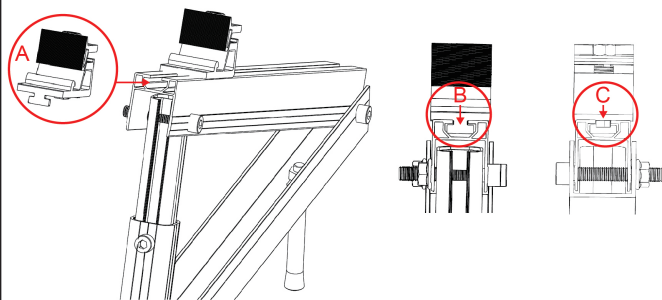

Step 4 Installation-W40B rail


* During fixing, the drill must force down as the arrow.

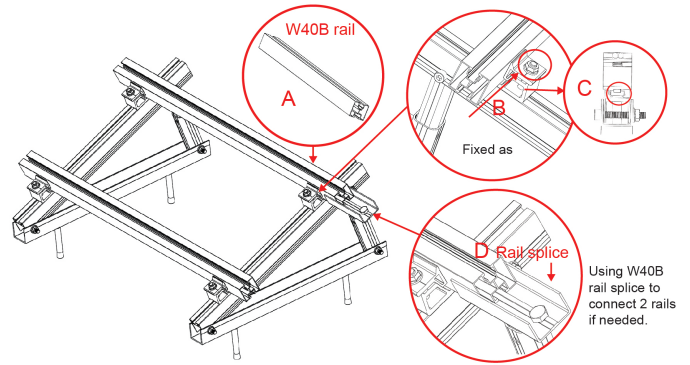

Step 5 Installation-panel

! 15Nm

Click end/mid clamp into the rail and fix panel with the screw.

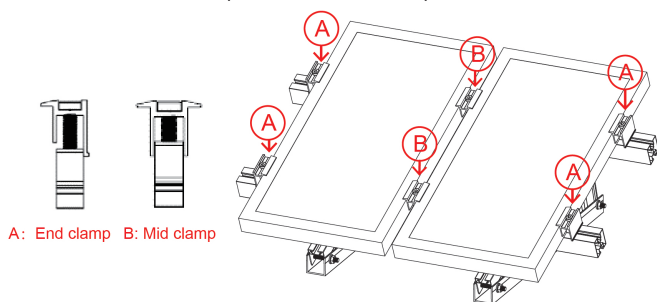

Step 6 Installation-Completed

